



Technology Integrators, Inc.

Signature Log Clamp



SLC-1180



SLC-1180 Rotate Clamp

Technology Integrators, representing products to improve productivity in the pressroom and bindery, introduces a new alternative to signature log handling. The Signature Log Clamp creates an efficient, ergonomic, & safe workplace where operators lift, transfer & position signature logs in the pressroom or bindery. Clamp sizes are available for all log palletization needs as well as all product sizes.

STANDARD SIZES:

- 23" close - 31" open cross tie palletization
- 29" close - 41" open skid width palletization
- 36" close - 48" open skid length palletization

PRODUCT SIZES:

- Quarter-fold
- Tabloid
- Double Digest

Smart Air Logic

The SLC clamp's air logic has evolved into the most user friendly control platform on the market.

NON-ROTATE AIR LOGIC INCLUDES:


- Auto Open or Jog Open
- Auto Close
- Open Safety Interlock
- Open Indicator Light
- Up/Down Speed Control

ROTATE SLC FEATURES:

- Auto Rotate Reset
- Auto Position Plate Reset
- Rotate 90° cw, 90° ccw, 180°
- Rotate Speed Control
- Rotate Lock-out Switch
- Rotate Direction Switch
- Position Plate Setup Switch

90° & 180° Rotation

All rotating clamps rotate 90° cw, 90° ccw and 180° satisfying every rotation requirement. To change from 90° to 180° rotation, simply flip toggle switch to setup mode, pull pin, and install in appropriate location. To change from 90° clockwise to 90° ccw simply flip direction toggle switch.

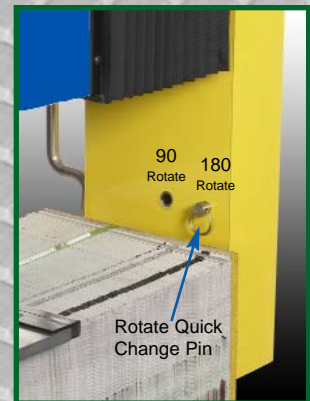

Visit www.technologyintegrators.net to view our streaming video library

Ergonomic Handles


The handle design including width, height, angle & position has evolved from 10 years of customer feedback, resulting in a truly ergonomic design.

SLC HANDLES INCLUDE:

- Logical Controls - the left hand controls the open and closing of the clamp. The right hand controls the up and down movement.
- Comfort - height and angle of handles fully adjust for operator comfort.
- Flexibility - handles can be mounted on left-side, right-side, end-mount or swing arm.



Swing Arm Handle

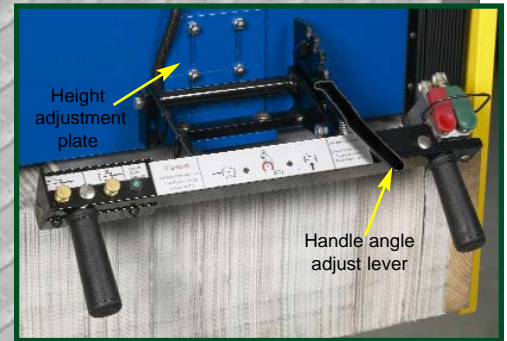

Standard Handle

Safety

Safety and clamp design have been hand in hand with the evolution of the SLC.

SLC SAFETY FEATURES:

- Bellow Safety Covers - protects operator from dangerous pinch points.
- Open Safety Interlock - prevents the SLC from opening with log.
- Air Safety Valve - prevents SLC from malfunction if air supply is lost.
- Clamping Force - SLC generates 1210# of clamping force at 80psi.




Safety Bellows

Perfect Alignment

The most important factor to successful log rotation is clamping the log in the center, both horizontally and vertically. The linear side vertical positioner and positioning plate horizontal positioner are easily adjusted to the height and width of the log allowing perfect rotation every time.



Horizontal Positioner



Set log width



Vertical Positioner



Technology Integrators, Inc.

Two Legend Park
Effingham, IL 62401

217-342-3981 Phone
217-342-1286 Fax

www.technologyintegrators.net